
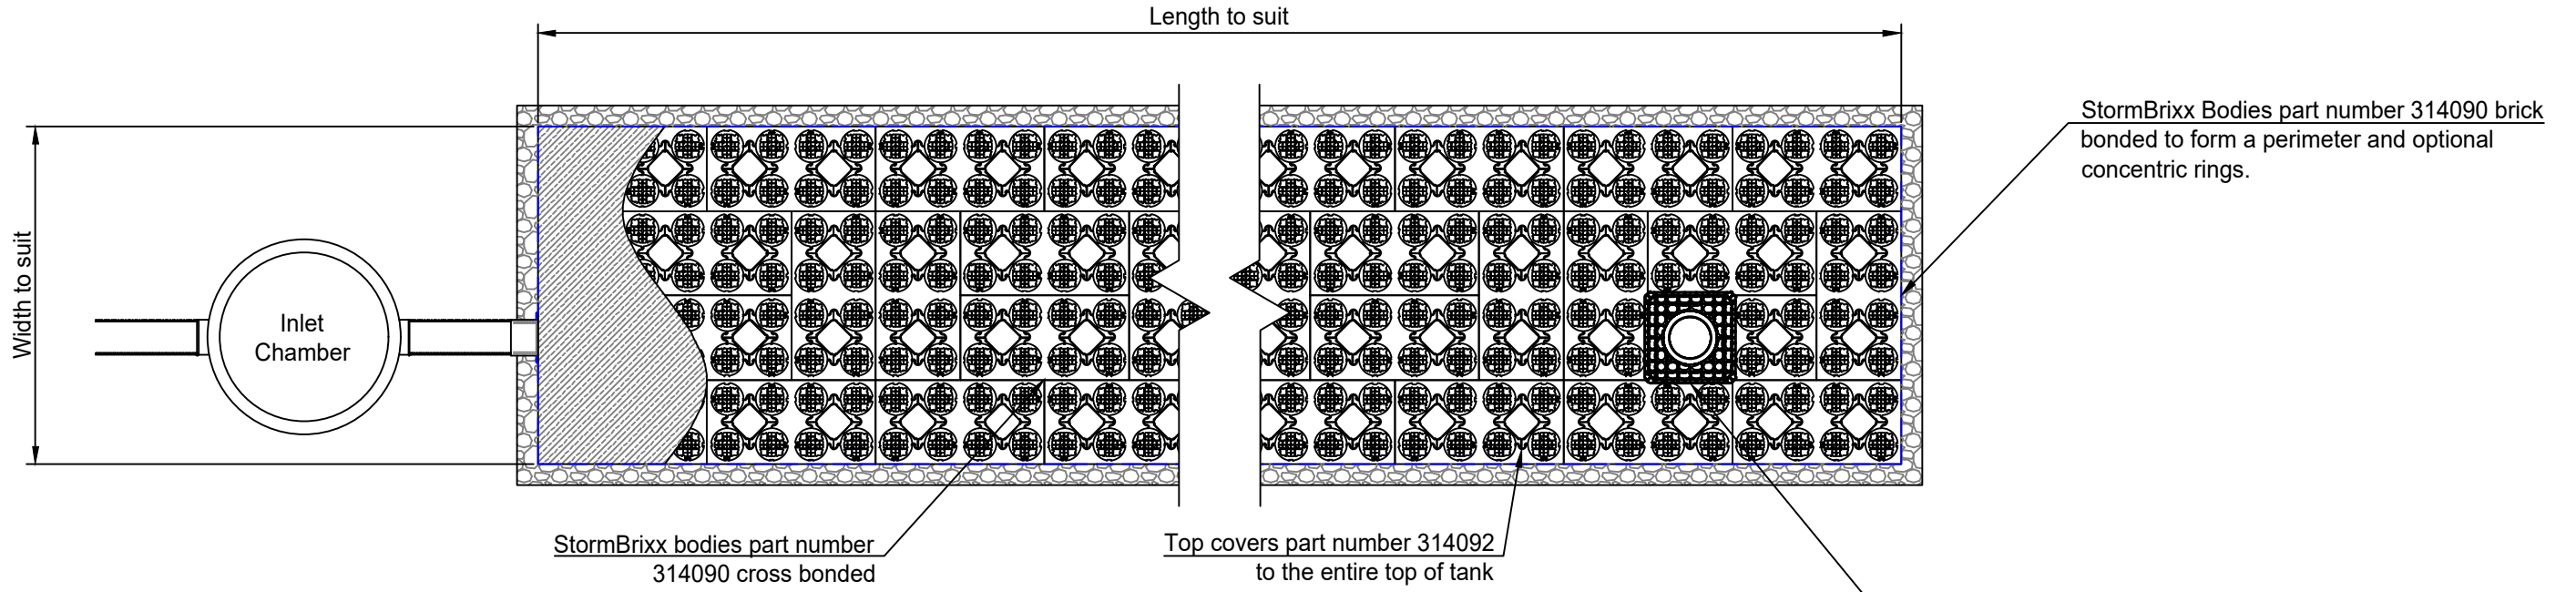


# Plan





# Elevation

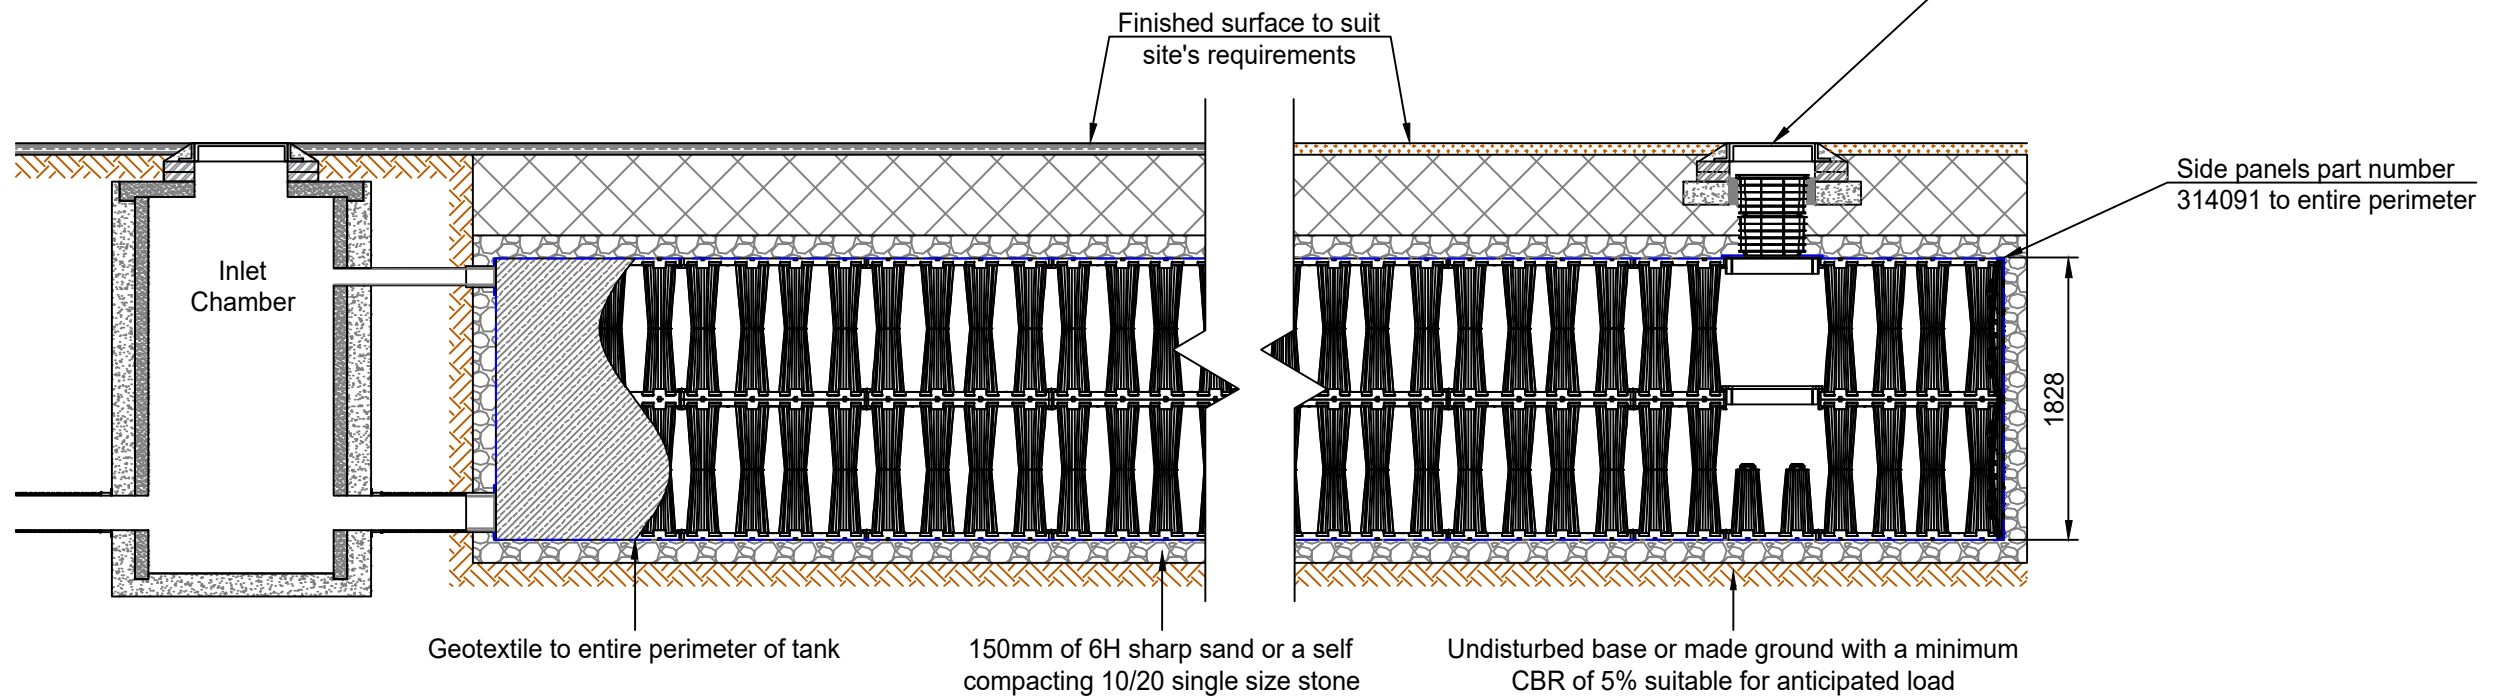

Minimum cover depths <sup>(1)</sup> over the top of ACO StormBrixx SD	
Location	Minimum cover depth (m) <sup>(2)</sup>
Non-Trafficked areas i.e landscaping	Please consult ACO
Car parks, vehicles up to 2500kg gross mass	Please consult ACO
Car parks, occasional vehicles greater than 2500kg <sup>(4)</sup> mass	Please consult ACO
Occasional HGV traffic up to 44000kg GVW (HA loading)	Please consult ACO

- (1) Assumed 27° load distribution angle through fill material and overlaying surface asphalt or block paving
- (2) Please check minimum frost check cover depths for geographical location
- (3) Minimum cover depth to avoid accidental damage from gardening/landscaping work
- (4) Occasional trafficking by refuse collection or similar vehicles (typically one per week)

A	25/10/17	Initial Issue	P.J
Version	Date	Description	Name
 ACO Technologies plc		Drawing Number: 23766	Revision: A
		Title: <b>ACO StormBrixx SD Soakaway 2 Layer Tank Installation Detail Drawing</b>	
Created by: P.J	Released by: L.D	Projection: ISO-A 	Units: mm
Created at: 25/10/17	Released at: 25/10/17	Information contained in this drawing is copyright property of ACO Technologies plc. Any reproduction in part or whole without written permission of ACO Technologies plc is prohibited	Format: A3
Replacement for: -	Replaced by: -		Scale: 1 : 50
			Sheet: 1 of 1